




# IXP Manager Introduction

AfIX, Mauritius  
August 2019

Nick Hilliard

Chief Technical Officer  
Internet Neutral Exchange Association  
Company Limited by Guarantee



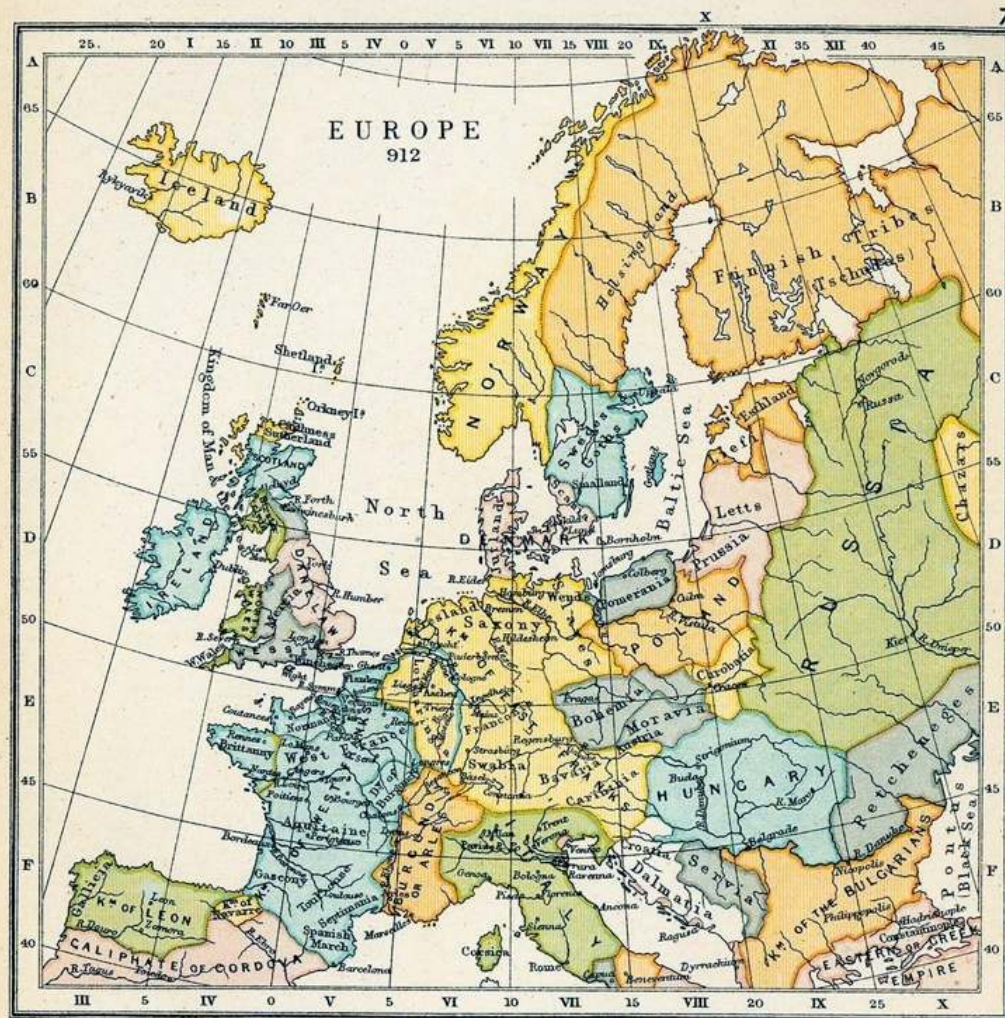

### Johnson's Normans

*Longmans, Green & Co., London, New York & Bombay.*



**dublin**



















## IXP Manager Workshop

# INEX Overview

- Founded in 1996
- 104 peering members
- ~320Gbit/s peak traffic
- Two infrastructures, 7 points of presence in Dublin
- Local IXP in Cork

## IXP Manager Workshop

# IXP Manager

- Full stack Management system for IXPs
- LAMP - Linux / Apache / PHP / MySQL
  - Any free unix clone
  - Any web server which supports PHP
  - MySQL
  - Some Perl where PHP doesn't work well
- Open source software - GPLv2
- Available on [github.com/inex](https://github.com/inex)

## IXP Manager Workshop

# History

- Early experience with operating an IXP using Excel and txt files (didn't work well)
- First CVS commits to IXP Manager v0.1 in May 2005
  - Based on in-house PHP framework written for another project in 2001/2002
  - In 2008, reduced route-server config complexity to a single tickbox per member
- Strategic realisation that INEX needed to invest in either people or software
- Hired Barry O'Donovan in 2008 to develop the application part-time
- Immediate decision to rewrite from scratch using Zend Framework
- IXP-Manager v1.0 deployed at INEX in July 2009
- Code de-INEX'd and released as IXP Manager v3.0 in Nov 2012.



## IXP Manager Workshop

# Current Status

- Full-time developer, Yann Robin, hired in Dec 2016
- IXP Manager v5 completed in May 2019
  - Mostly an infrastructure update
  - Migration from Zend Framework to Laravel completed
  - Important but invisible work
- Now adding new features
- Development model is mostly linear
- In production at ~75 IXPs worldwide

## IXP Manager Workshop

# Development Model

- Development structure can be found on [www.ixpmanager.org](http://www.ixpmanager.org)
  - 3 year development plan, with sponsored funding model
  - Currently main sponsors are ISOC, Netflix, SwissIX and Facebook
  - Additional sponsorship: APNIC, ZA-INX, STH-IX, GR-IX, Interlan, NaMeX, NIX
  - Other funding from: LONAP, DE-CIX
- All copyright owned by INEX - Internet Neutral Exchange Association CLG
- Day-to-day development handled by Island Bridge Networks Ltd
- Annual project report is publicly available from the web site
- Full financial details provided annually to all sponsors

## IXP Manager Workshop

# Functionality

- Administrative portal for managing an IXP
- Abstracted model of an IXP which includes:
  - Infrastructures, VLANs, locations, cabinets, patch panels, switches, switch ports, IP addresses, MAC addresses, IXP members, user accounts, route servers, IRRDB configuration
- Monitoring information includes per-member statistics (bits, packets, errors, discards), p2p traffic from sflow telemetry and Peering Matrix
- Integration with third party packages (Birdseye Looking Glass), BIRD, BIND, Mailman, smokeping, tac\_plus4, Nagios, etc
- Member login system provides Peering Manager, route server prefix analysis tool, graph views



Search for...



## Dashboard

## IXP CUSTOMER ACTIONS

Customers

Interfaces / Ports

Patch Panels

Users

Contacts

Colocated Equipment

## IXP ADMIN ACTIONS

Infrastructures

Facilities

Racks

VLANs

Switches

Routers

Console Servers

Core Bundles

IP Addresses

## Overall Customer Numbers

Customer Type	Count
Full	104
Associate	16
Internal	2
Pro-bono	5

## Customers by Location

Location	Customers
Equinix DB2 (Kilcarbery)	77
Equinix DB1 (Citywest)	58
Interxion DUB1	38
Cork Internet Exchange	19
Equinix DB3 (NWBP)	17
BT Citywest	12
Interxion DUB2	6
Vodafone Willsborough	1


Day

Week

Month


Year

## INEX Aggregate Traffic

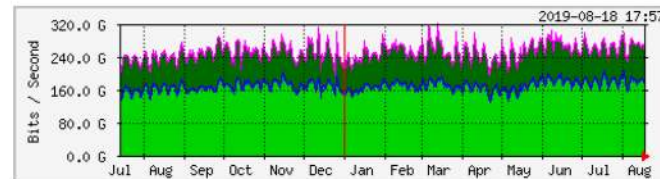

	Max	Average	Current
In	317.028 Gbits	168.602 Gbits	92.110 Gbits
Out	317.028 Gbits	168.631 Gbits	92.137 Gbits

## INEX LAN1 Aggregate Traffic

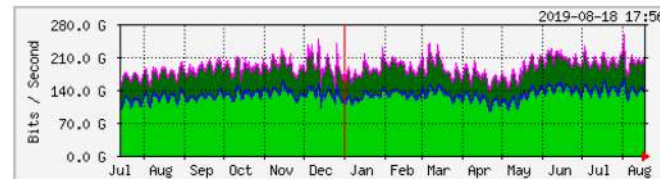

	Max	Average	Current
In	254.673 Gbits	129.354 Gbits	75.702 Gbits
Out	255.106 Gbits	129.397 Gbits	75.730 Gbits

## IXP Manager Workshop

# User Portal

- Graphs and Statistics, Cross-connects, Port configuration
- Peering Manager
  - Provides an interface to help IXP participants handle bilateral peering
  - System for sending templated emails
  - “De-mystification” mechanism to make it easier for IXP users
- Route server prefix analysis tool
  - Compares prefixes learned via BGP to route server to what members have included in their IRRDB policy
  - IXP Manager uses strict IRRDB filtering by default
- IXP administrators can temporarily switch privileges to any user

## Your INEX - IXP Manager Dashboard

Overview

Details

Ports

Cross Connects

Filtered Prefixes »


P2P »

Peering Manager »

Statistics »

Peer to Peer Traffic »

### Aggregate Traffic Statistics

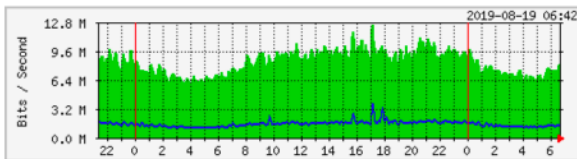**In**  
**Out**

Max

14.460 Mbits

Average

8.331 Mbits

Current

8.067 Mbits

5.261 Mbits

1.477 Mbits

1.352 Mbits

### Recent Members

Our five most recent members are listed below. Have you arranged peering with them yet?

Name	AS Number	Date Joined
<a href="#">Sirius</a>	<a href="#">AS60501</a>	2019-06-24
<a href="#">Convergence</a>	<a href="#">AS39120</a>	2019-03-29
<a href="#">Titania Networks Limited</a>	<a href="#">AS56911</a>	2019-02-04
<a href="#">RETN</a>	<a href="#">AS9002</a>	2019-01-28
<a href="#">SIPSYNERGY</a>	<a href="#">AS51409</a>	2018-10-12

### Your Logo



No logo uploaded which means it is not currently displayed on our public website. Please [click here](#) to add one now.



## IXP Manager Workshop

# IXP Port Configuration

- Supports all the usual things you'd expect to see at an IXP
- Enables port configuration using an abstracted model
  - Physical interfaces: what you plug a cross-connect into
  - VLAN interfaces: what the customer sees
  - Virtual interfaces: attaches VLAN interfaces to physical interfaces

Search for...



## IXP CUSTOMER ACTIONS

[Customers](#)[Interfaces / Ports](#)[Physical Interface](#)[Vlan Interface](#)[Sflow Receivers](#)[Patch Panels](#)[Users](#)[Contacts](#)[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)[Facilities](#)[Racks](#)[Routers](#)[Switches](#)[Core Bundles](#)[IP Addresses](#)[MAC Addresses](#)[Vendors](#)[Console Server Connections](#)[VLANs](#)[IRRDB Configuration](#)[Route Server Prefixes](#)

## IXP STATISTICS

[/ Home](#) / [\(Virtual\) Interfaces](#) / Edit Physical Interface

## Physical Interface Settings

Switch

swi1-nwb1-1 ▾

Switch Port

Ethernet11 (Peering) ▾

Status

Connected ▾

Speed

1 Gbps ▾

Duplex

full ▾

☒ Auto-Negotiation Enabled

Monitor Index

1

Notes

Save Changes

Cancel

Help

Search for...



## IXP CUSTOMER ACTIONS

[Customers](#)[Interfaces / Ports](#)[Physical Interface](#)[Vlan Interface](#)[Sflow Receivers](#)[Patch Panels](#)[Users](#)[Contacts](#)[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)[Facilities](#)[Racks](#)[Routers](#)[Switches](#)[Core Bundles](#)[IP Addresses](#)[MAC Addresses](#)[Vendors](#)[Console Server Connections](#)[VLANs](#)[IRRDB Configuration](#)[Route Server Prefixes](#)

## IXP STATISTICS

[/ Home](#) / [Vlan Interfaces](#) / Edit VLAN Interface (AS112 Reverse DNS [AS112])

## General VLAN Settings

Vlan

Peering VLAN #1 ▾

Max BGP Prefixes

0

☐ Multicast Enabled☐ Busy host☒ IPv6 Enabled☒ IPv4 Enabled☒ Route Server Client☒ Apply IRRDB Filtering☐ IRRDB - Allow More Specifics?☐ AS112 Client

## IPv6 Details

IPv6 Address

2001:7f8:18::6 x ▾

IPv6 Hostname

as112-vl10.inex.ie

IPv6 BGP MD5 Secret

☐ IPv6 Ping Allowed / Possible☒ IPv6 Monitor Route Collector BGP

## IPv4 Details

IPv4 Address

185.6.36.6 x ▾

IPv4 Hostname

as112-vl10.inex.ie

IPv4 BGP MD5 Secret

☒ IPv4 Ping Allowed / Possible☒ IPv4 Monitor Route Collector BGP

Save Changes

Cancel

Help



Search for...



IXP CUSTOMER ACTIONS

Customers

Interfaces / Ports

Physical Interface

Vlan Interface

Sflow Receivers

Patch Panels

Users

Contacts

Colocated Equipment

IXP ADMIN ACTIONS

Infrastructures

Facilities

Racks

Routers

Switches

Core Bundles

IP Addresses

MAC Addresses

Vendors

Console Server Connections

VLANs

IRRDB Configuration

Route Server Prefixes

IXP STATISTICS

/ Home / (Virtual) Interfaces / Add/Edit Virtual Interface



Customer

AS112 Reverse DNS ▾

Use 802.1q framing

☐ Link aggregation / LAG framing

Type

Peering

Save Changes

Help

Advanced Options

Return to Customer Overview

Physical Interfaces +

Facility

Peering Port

Speed/Duplex

Equinix DB3 (NWBP)

swi1-nwb1-1 :: Ethernet11

1 Gbps / full duplex AN



VLAN Interfaces +

VLAN Name

VLAN Tag

Configured MAC Address(es)

IPv4 Address

IPv6 Address

Peering VLAN #1

10

0a:9a:1a:ce:42:9f

185.6.36.6

2001:7f8:18::6



Sflow Receivers +

## IXP Manager Workshop

# MAC Addresses

- Static MAC addresses
  - Allows the IXP operator to configure a list of MAC addresses per VLAN interface
  - This information is exportable and can be used to configure switches
- Dynamic MAC addresses
  - A database of MAC addresses pulled from the IXP switches via SNMP
  - Used for Sflow integration and the Peering Matrix

## IXP Manager Workshop

# Patch Panels

- Everyone has difficulty with patch panels and cross-connects
  - ... including data centres
- Most people manage their cross-connect deployments using
  - Text files
  - Spreadsheet
  - Wiki
  - Post-it notes



## IXP CUSTOMER ACTIONS

[Customers](#)[Interfaces / Ports](#)[Sflow Receivers](#)[Patch Panels](#)[Patch Panel Port](#)[Users](#)[Contacts](#)[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)[Facilities](#)[Racks](#)[Routers](#)[Switches](#)[Core Bundles](#)[IP Addresses](#)[MAC Addresses](#)[Vendors](#)[Console Server Connections](#)[VLANs](#)[IRRDB Configuration](#)[Route Server Prefixes](#)

## IXP STATISTICS

[Member Statistics - Graphs](#)[/ Home](#) / [Patch Panels \(Active Only\)](#)

Filter Options

Show Inactive

Show  entries

Search:

Name	↕	Rack	↕	Colocation	↕	Type	↕	Ports Available	↕	Installation Date	↕	Action	↕
<a href="#">DUB02.17.R01.01</a>		<a href="#">INEX-PWT2-1</a>		<a href="#">IE.DUB.DUB2.19.DDF1.U01</a>		UTP / RJ45		<span>22 / 24</span>		2017-03-27			
<a href="#">DUB02.17.R01.01.U41</a>		<a href="#">INEX-PWT2-1</a>		<a href="#">IE.DUB.DUB2.19.ODFB.U77</a>		SMF / SC		<span>5 / 6</span> <span>10 / 12</span>		2017-03-27			
<a href="#">DUB02.17.R01.01.U43</a>		<a href="#">INEX-PWT2-1</a>		<a href="#">IE.DUB.DUB2.19.ODFA.U78</a>		SMF / SC		<span>3 / 6</span> <span>6 / 12</span>		2017-03-27			
<a href="#">IE.DUB.DUB1.19.R01.ODF05.U47.J</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.19.R01.ODF05.U47.J</a>		SMF / LC		<span>9 / 12</span> <span>18 / 24</span>		2017-09-04			
<a href="#">IE.DUB.DUB1.19.R01.ODF05.U47.K</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.19.R01.ODF05.U47.K</a>		SMF / LC		<span>12 / 12</span> <span>24 / 24</span>		2017-09-04			
<a href="#">IE.DUB.DUB1.2B.R03.01.U1-6.A</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.19.R01.ODF04.U47</a>		SMF / SC		<span>1 / 6</span> <span>2 / 12</span>		2014-11-14			
<a href="#">IE.DUB.DUB1.2B.R03.01.U1-6.B</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.19.R01.ODF04.U46</a>		SMF / SC		<span>2 / 6</span> <span>4 / 12</span>		2014-11-14			
<a href="#">IE.DUB.DUB1.2B.R03.01.U46</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.2B.R03.01.U46</a>		SMF / SC		<span>0 / 12</span> <span>0 / 24</span>		2013-07-01			
<a href="#">IE.DUB.DUB1.2B.R03.01.U48</a>		<a href="#">INEX-PWT1-1</a>		<a href="#">IE.DUB.DUB1.2B.R03.01.U48</a>		UTP / RJ45		<span>13 / 24</span>		2013-07-01			
<a href="#">L17-U47-C1</a>		<a href="#">INEX-CIX-1</a>		<a href="#">L17-U47-C1</a>		SMF / LC		<span>0 / 12</span> <span>0 / 24</span>		2016-04-01			

Showing 1 to 10 of 45 entries

Previous

[1](#)[2](#)[3](#)[4](#)[5](#)[Next](#)



## IXP Manager Workshop

# Patch Panels

- IXP Manager's patch panel support includes
  - Fibre, UTP, different termination types
  - Simplex / duplex connections
  - Live-links to IXP port configurations
  - Simplex / duplex connections
  - Cross-connect history
  - Customer-visible and private notes
  - LOAs via email (PDF) with authentication via live-links
- Doesn't support circuits or linking cross-connects together

Search for...



## IXP CUSTOMER ACTIONS

[Customers](#)[Interfaces / Ports](#)[Sflow Receivers](#)[Patch Panels](#)[Patch Panel Port](#)[Users](#)[Contacts](#)[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)[Facilities](#)[Racks](#)[Routers](#)[Switches](#)[Core Bundles](#)[IP Addresses](#)[MAC Addresses](#)[Vendors](#)[Console Server Connections](#)[VLANs](#)[IRRDB Configuration](#)[Route Server Prefixes](#)

## IXP STATISTICS

[Member Statistics - Graphs](#)[Home](#) / [Patch Panel Port - PP:](#) [Worker]

## Ports for PP: [Worker] (Colo Ref: PP: ) INEX-CWT1-1, Equinix DB1 (Citywest) [SMF/SC]

Search:

Name	Description / Switch / Port	Customer	Colocation Ref	Flags	Assigned at	State	Action
F1/F2 (1)	Link to Vodafone Clonshaugh	INEX		INT €	2013-04-17	Connected	Action  0
F3/F4 (2)	swi1-cwt1-1 :: Ethernet8			N-	2013-02-18	Connected	Action  0
F5/F6 (3)	swi1-cwt1-1 :: Ethernet9			N+	2013-03-29	Connected	Action  0
F7/F8 (4)	Core: Eunetworks Metro KCP1-CWT1 ( )	INEX		INT N-	2017-05-08	Connected	Action  0
F9/F10 (5)	swi1-cwt1-1 :: Ethernet11				2009-11-20	Connected	Action  0
F11/F12 (6)				N-	2014-10-10	Connected	Action  0

Showing 1 to 6 of 6 entries

## IXP Manager Workshop

# IXP Resellers

- Many IXPs introducing reseller programs
- A “customer” can be both a reseller and an IXP participant
- Supported for fan-out ports
  - Resellers see their fanout ports
  - Resold members see their peering ports
  - Requires either physical fanout or else sub-interface fanout
- No reduction in functionality for resold members
- MRTG / P2P graphing all compatible
- Skin API documented at: <http://git.io/he2RmQ>

## IXP Manager Workshop

# Graphing

- Three primary graphing interfaces available
- MRTG
  - Used for bits, packets, errors, discards
  - Simple but functional - allows abstraction of the switch interface name
  - Potential scalability issues on larger IXPs
- Smokeping
  - Measures RTT to all routers on the IXP
  - Mostly measures how busy the remote control plane is
  - Invaluable for debugging connectivity problems



## IXP Manager Workshop

# Graphing

- Sflow
  - Custom-built interface to process sflow flow records
  - Used for peer-to-peer graphs and BGP peering matrix
  - Peer-to-peer are considered invaluable by IXP participants
  - Functionality depends on sflow support on the IXP switches
    - Hardware support for sflow is mixed but improving
    - Native support in all recent Broadcom and Mellanox chipsets
    - Some vendors don't make this work properly at the user level
  - FreeBSD UFS found to work better than Linux ext3 for RRD store

Search for...



## IXP CUSTOMER ACTIONS

[Customers](#)  
[Interfaces / Ports](#)  
[Sflow Receivers](#)  
[Patch Panels](#)  
[Users](#)  
[Contacts](#)  
[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)  
[Facilities](#)  
[Racks](#)  
[Routers](#)  
[Switches](#)  
[Core Bundles](#)  
[IPv4/6 Addresses](#)  
[MAC Addresses](#)  
[Vendors](#)  
[Console Server](#)  
[Connections](#)  
[VLANs](#)  
[IRRDB Configuration](#)  
[Route Server Prefixes](#)

## IXP STATISTICS


[Member Statistics -](#)  
[Graphs](#)

[Home](#) / [Statistics](#) / [Peering](#) / [Peer to Peer Statistics with \[redacted\] Bits /](#)


## Traffic exchanged with: [redacted]

[Return](#)LAN: Graph Type: Protocol: 


## Day

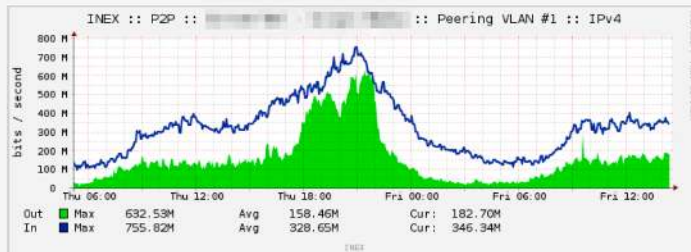


## Week

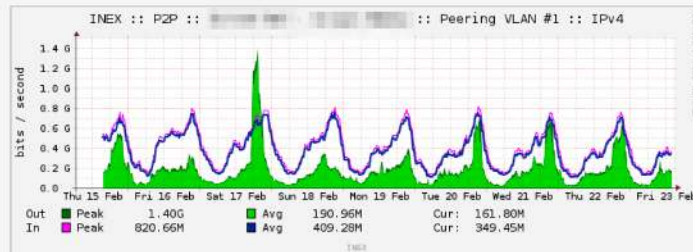

## Month

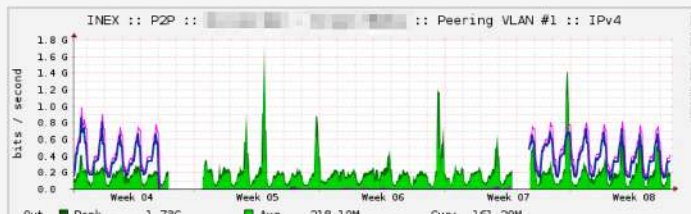

## Year

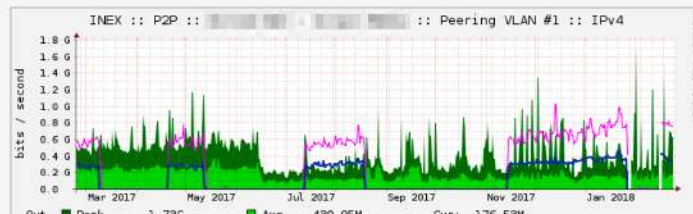

## IXP Manager Workshop

# Route Servers

- Critical for all IXPs due to overhead of maintaining full-mesh bilateral peering
- Generates secure-by-default configurations
  - Strict prefix and ASN filtering enabled using IRRDB info
    - Can be disabled per customer. This is a really bad idea. Don't disable it.
  - MD5 and per-protocol max prefixes
- Default templating skin doesn't support RPKI
  - RPKI on route servers is more subtle than it looks
- Implementation is designed to discourage manual hacks (this is a feature)

## IXP Manager Workshop

# IRRDBs

- Used for Route server configuration generation
- Allows admin-defined IRRDB evaluation policies
  - Custom IRRDB policy can be configured per member
- Building complex prefix lists can cause performance problems
  - phase 1: pull IRRDB route objects to local DB using bgpq3
  - phase 2: build prefix lists from local DB
- Won't work with Quagga for some ASNs
- Needs PHP-DS add-on module

## IXP Manager Workshop

# Templating and APIs

- Each IXP shares a common set of requirements but also has its own needs
- IXP Manager supports Skins and an API-based data exporter
- Skins
  - High complexity level
  - Written with PHP and Smarty
  - Intended for complex functionality, e.g. Route Server config
  - All functionality bundled with IXP Manager distribution
  - Can be extended on local installations, but care needed for future portability
  - Used for almost everything from User-Interface to “Routers” to graphing



## IXP Manager Workshop

# Skin Example: Routers

- An IXP Manager Router is an abstraction of a device which speaks BGP
  - Route server, route collector, AS112
- Trivially easy to create router instances for this functionality (INEX has 30)
- Integrates fully with Birds Eye Looking Glass
- Current skins support only BIRD
- Previous versions of IXP Manager also supported Quagga
  - Difficult to manage this because it lacks atomic config rewrite + reload
- Other options available:
  - OpenBGPD, GoBGP

Search for...



## IXP CUSTOMER ACTIONS

[Customers](#)[Interfaces / Ports](#)[Sflow Receivers](#)[Patch Panels](#)[Users](#)[Contacts](#)[Colocated Equipment](#)

## IXP ADMIN ACTIONS

[Infrastructures](#)[Facilities](#)[Racks](#)[Routers](#)[Live Status](#)[Switches](#)[Core Bundles](#)[IP Addresses](#)[MAC Addresses](#)[Vendors](#)[Console Server Connections](#)[VLANs](#)[IRRDB Configuration](#)[Route Server Prefixes](#)

## IXP STATISTICS

[Member Statistics - Graphs](#)[/ Home](#) / [Router](#) / Edit 13

Handle*	rc1q-lan1-ipv4	
Vlan	Quarantine VLAN - LAN1	▾
Protocol	IPv4	▾
Type	Route Collector	▾
Name*	INEX LAN1 - Quarantine Route Collector - IPv4	
ShortName*	RC1 - LAN1 - IPv4	
Router ID*	185.6.36.126	
Peering IP	185.6.36.126	
ASN*	2128	
Software	Bird	▾
Management Host*	10.39.5.214	
API Type	Birdseye	▾
API Endpoint	http://rc1q-lan1-ipv4.mgmt.inex.ie/api	
LG Access Privileges	PUBLIC	▾

## IXP Manager Workshop

# Templating and APIs

- API Data Exporters
  - exports core database information in abstracted format
  - Supports JSON and YAML output
  - This can be fed into your favourite templating system
    - e.g. INEX uses Smarty and Jinja2/SaltStack
    - No issues with using your own favourite templating mechanism
  - Future portability assured with REST endpoint stability
  - INEX is likely to move some “core” functionality to this mechanism
  - Documentation is in progress for these APIs
  - IX-F / Euro-IX JSON data export schema works out of the box

## IXP Manager Workshop

# Summary

- Full stack IXP administration application
- Supports most things that IXPs need to do
- Suitable for most IXPs
- In active development with sponsorship from many organisations
- Community Supported
- Join mailing list at: [www.ixpmanager.org/support.php](http://www.ixpmanager.org/support.php)
- It will make your life easier

THANK YOU

# Thanks!

